

NCE(D) H.F Energy saving circulating pumps with flanges



Construction

Energy saving variable speed circulating pump driven by a permanent magnet synchronous motor (pm) controlled by on board inverter.

Applications

Heating and conditioning systems.

Operating conditions

- Liquid temperature from +2 °C to +110 °C
- Ambient temperature from 0 °C to +40 °C
- Maximum permissible working pressure: 10 bar
- Storage: -20°C/+70°C max. relative humidity 95% at 40 °C
- Certifications: in conformity with CE requirements
- Sound pressure \leq 40 dB (A).
- Minimum suction pressure:
 - 0,05 bar at 75 °C
 - 0,28 bar a 90 °C.
- Maximum glycol quantity: 20%.
- EMC according to: EN 55014-1, EN 55014-2
EN 61000-3-2, EN 61000-3-2.
- Connections: Flanges according to PN 6/10, EN 1092-2, DN 32, 40, 50.
- The benchmark for most efficient circulators is $EEL \leq 0,20$.

Motor

Synchronous motor with permanent magnet.

- Motor: variable speed
- Standard voltage: single-phase 230 V (-10%;+6%)
- Frequency: 50/60 Hz
- Protection: IP 44
- Insulation class: F
- Overload protection (integrated).
- Cable: phases and neutral.
- Constructed in accordance with: EN 60335-1, EN 60335-2-51.


Special features on request

Additional module (included with NCE(D) H.F):

- Modbus
- Ethernet
- analog input 0-10V
- remote on/off input
- output relay

Designation

NCE(D) H 40 F - 60 / 220

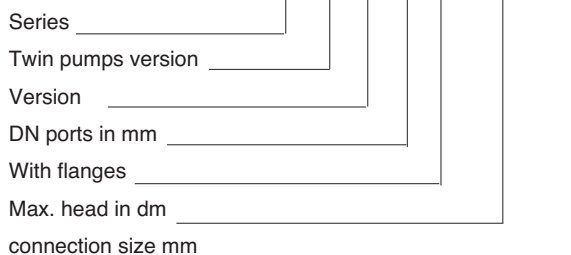

Features

Smart pump

NCE H.F adapt its functions to the system: the circulator measures the pressure and the flow and adjusts the speed to the selected pressure.

Easy use

There are different operating modes selectable from the control panel.

NCE(D) H.F Energy saving circulating pumps with flanges



Operating modes



Automatic mode

(factory setting):

In this mode the pump automatically sets the operating pressure, depending on the hydraulic system. This mode is recommended in most systems.



Proportional pressure mode:

The circulator changes the pressure proportionally to the current flow. The pressure value can be adjusted with the + and - buttons.



Constant pressure mode:

The circulator maintains the pressure constant when the reference flow changes. The pressure value can be adjusted with the + and - buttons.




Fixed speed mode:

The circulator works with constant curve and the curve could be changed using + e - buttons.



Night mode:

When the liquid temperature fall by 15-20°C the pump automatically swiches to night mode, in practice the circulator works at minimum curve. When the temperature rises again the pump comes back to the selected mode. The night mode could be selected with any operating mode.

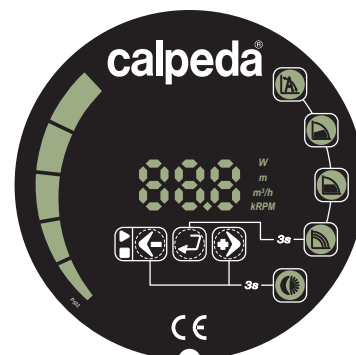


Operating mode-control panel

NCE(D) H.F could works in:

- automatic mode
- proportional pressure mode
- constant pressure mode
- fixed speed mode
- night mode

The night mode could be selected with any operating mode.









Coverage chart

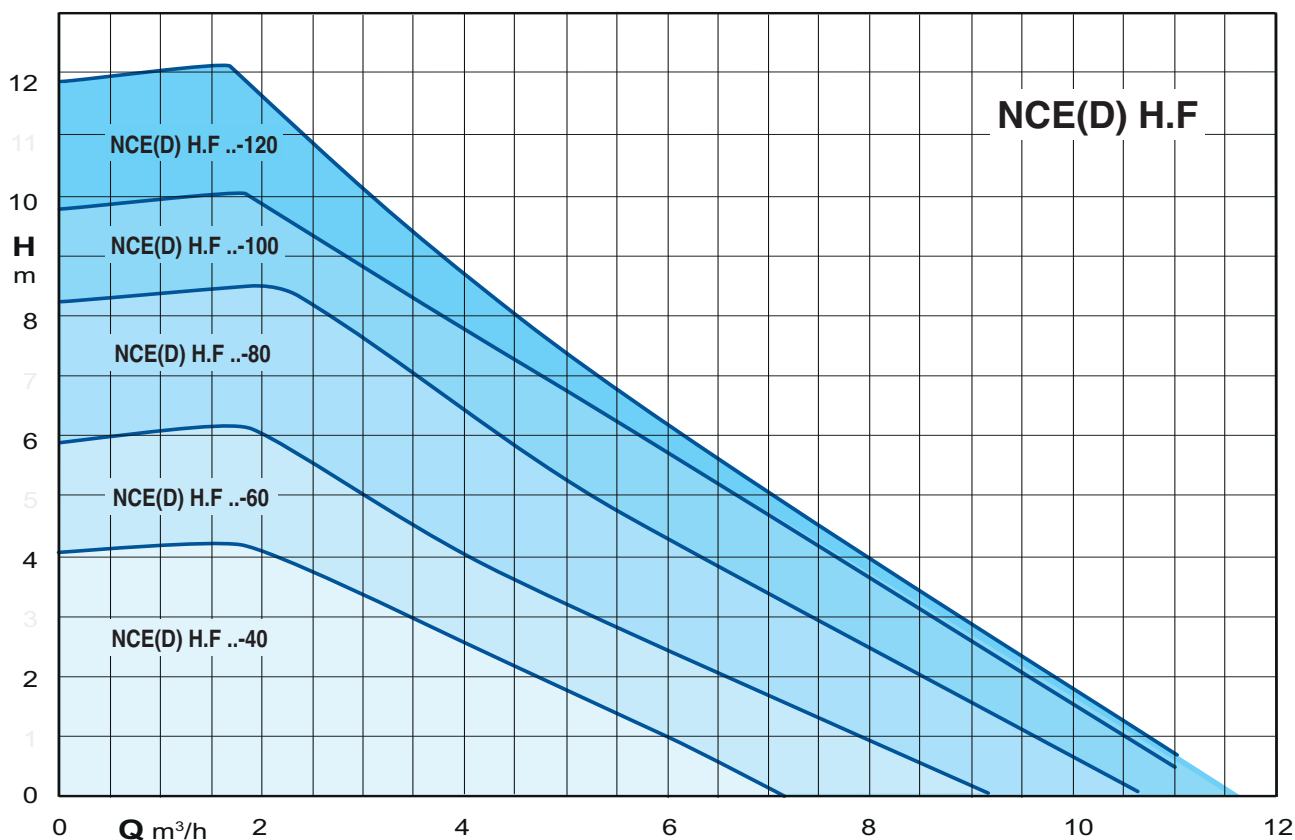

NCE(D) H.F Energy saving circulating pumps with flanges




Characteristic curves

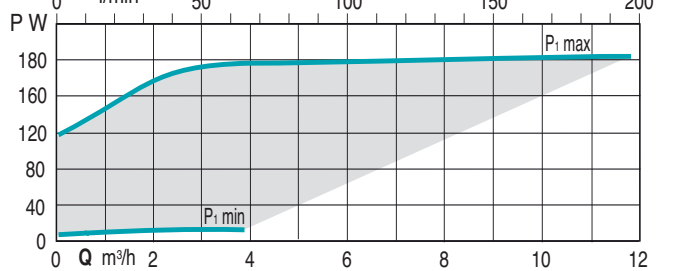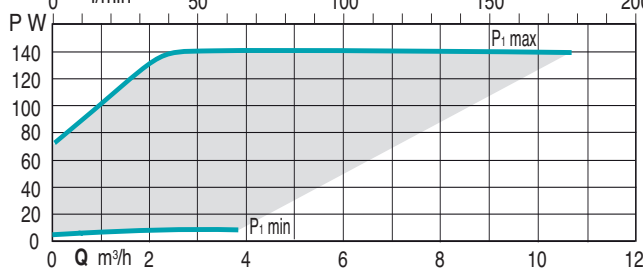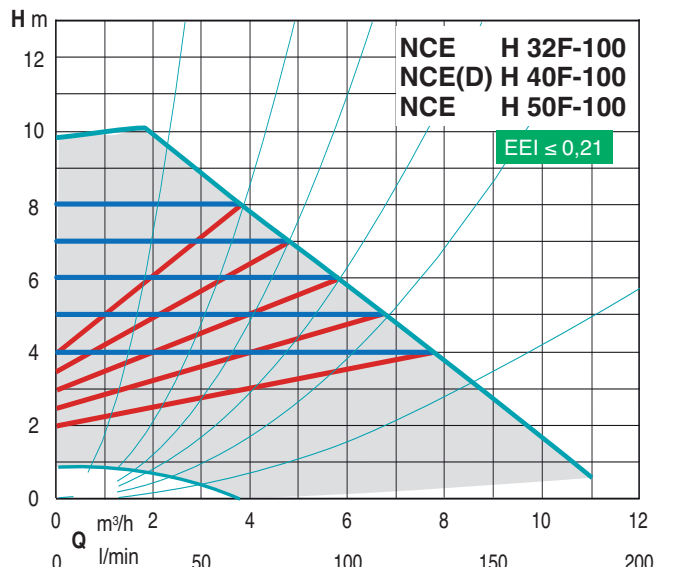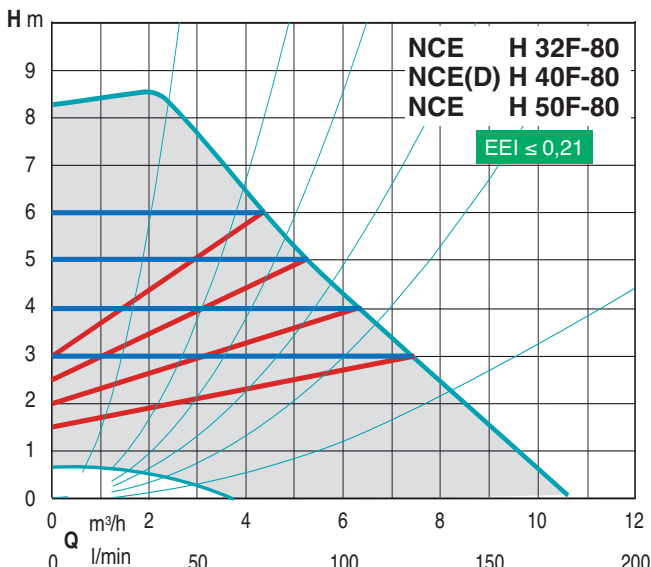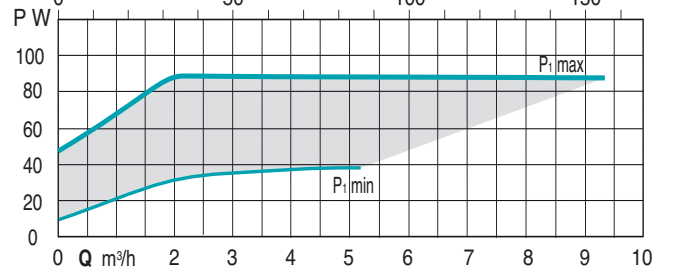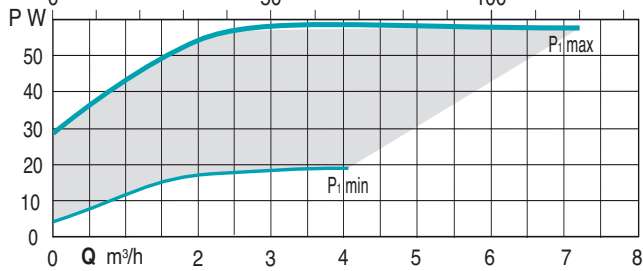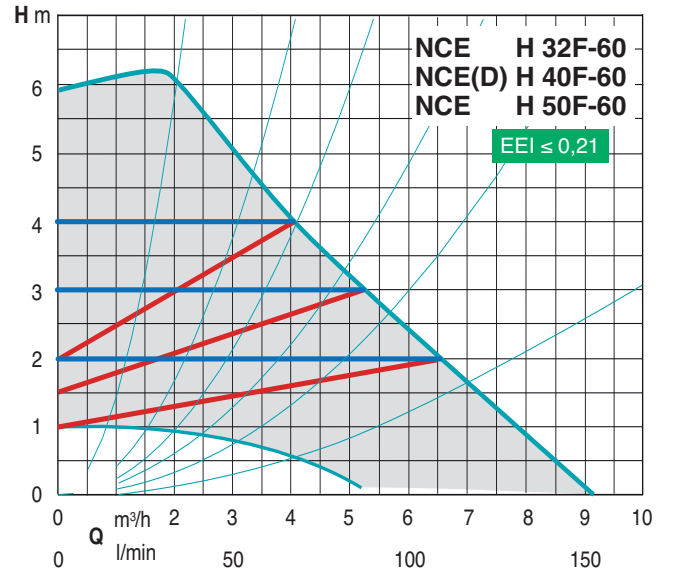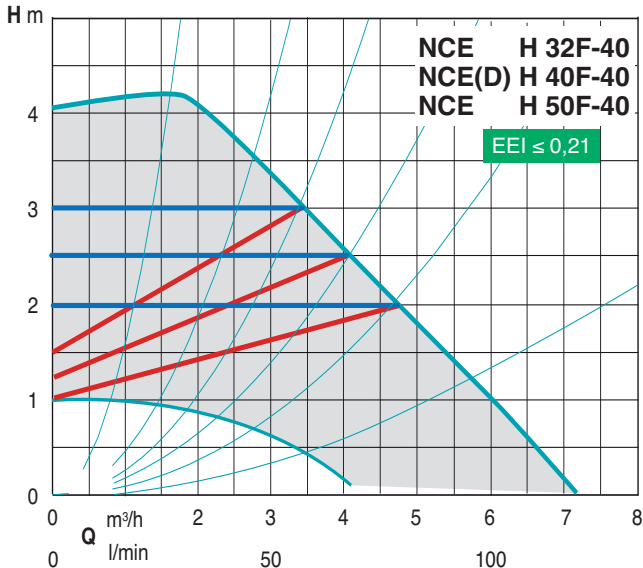

NCE(D) H.F Energy saving circulating pumps with flanges




Characteristic curves

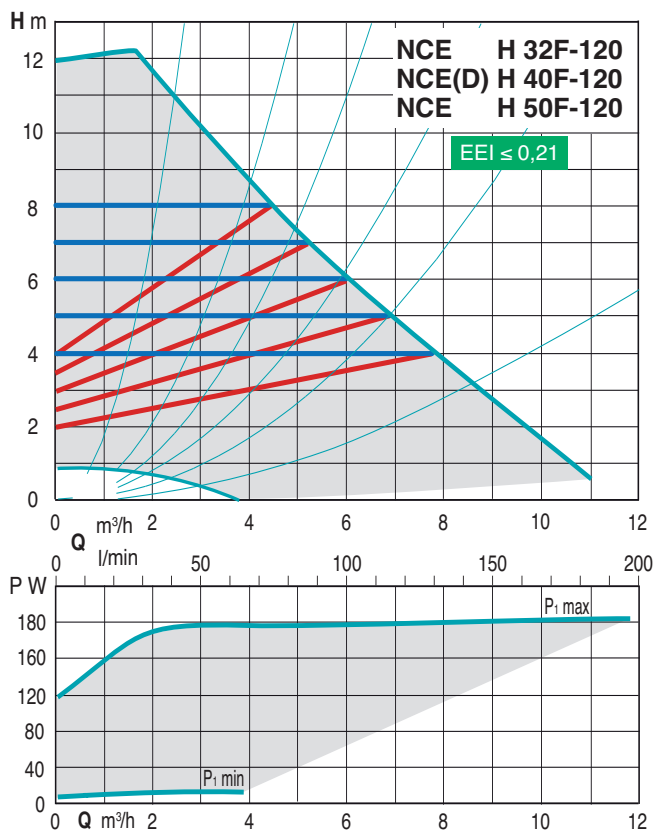

Materials


| Component | Pos. | Material |
|-----------------|------|---------------------------|
| Pump casing | 1 | Cast iron GJL 200 EN 1561 |
| Impeller | 2 | Composite |
| Shaft | 3 | Stainless steel |
| Bearings | 4 | Carbon |
| Thrust bearing | 5 | Ceramic |
| Rotor | 6 | Stainless steel jacket |
| Winding | 7 | Copper wire |
| Electronic card | 8 | - |
| Gasket | 9 | EPDM |

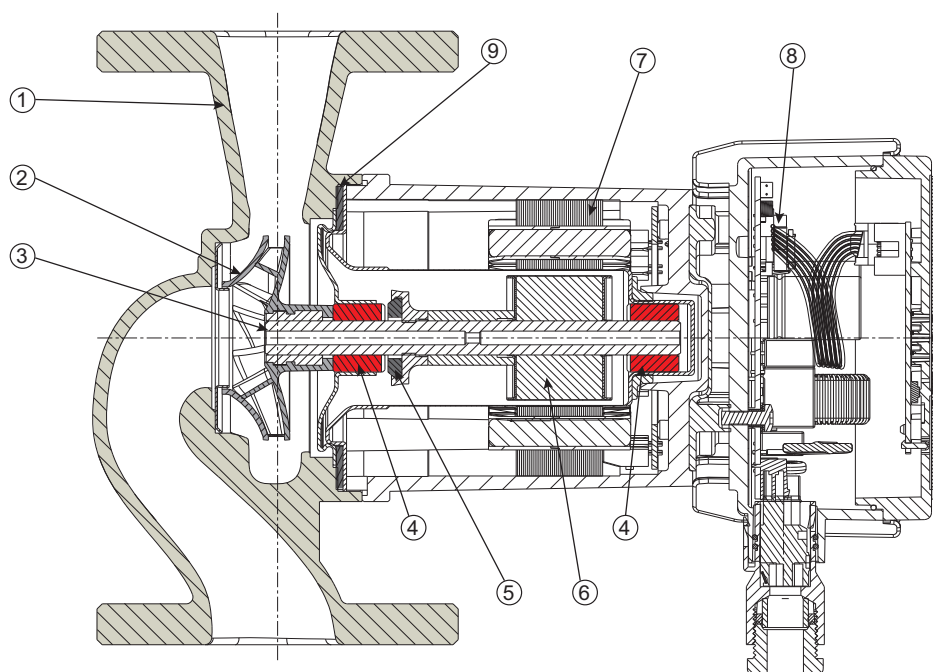



NCE(D) H.F Energy saving circulating pumps with flanges



Examples of installations

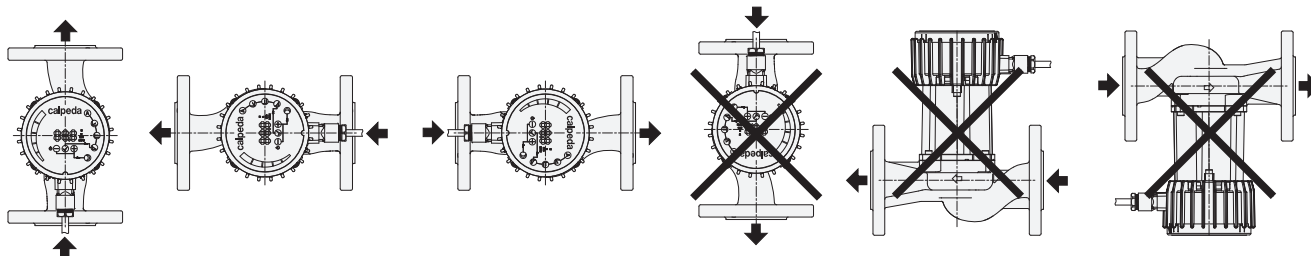

Dimensions and weights

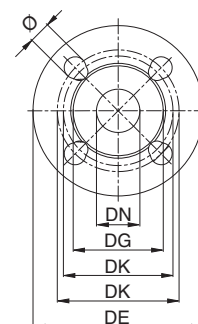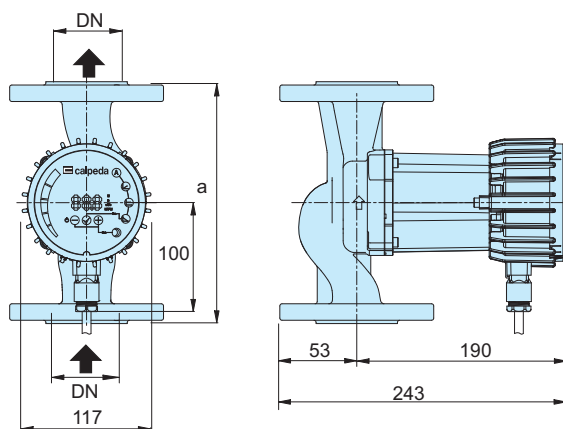


| TYPE | DN | H m | Q m ³ /h | 1~ 230 V | | P ₁ | | a mm | kg |
|-------------------|----|--------|------------------------|----------|-------|----------------|-------|---------|-----|
| | | | | A min | A max | W min | W max | | |
| NCE H 32F-40/220 | 32 | 4 | 5 | 0,1 | 0,5 | 10 | 60 | 220 | 7,4 |
| NCE H 40F-40/220 | 40 | | | | | | | 220 | 8,5 |
| NCE H 50F-40/240 | 50 | | | | | | | 240 | 9,8 |
| NCE H 32F-60/220 | 32 | 5 | 7,5 | 0,1 | 0,75 | 10 | 90 | 220 | 7,4 |
| NCE H 40F-60/220 | 40 | | | | | | | 220 | 8,5 |
| NCE H 50F-60/240 | 50 | | | | | | | 240 | 9,8 |
| NCE H 32F-80/220 | 32 | 8 | 9 | 0,1 | 1,15 | 10 | 140 | 220 | 7,4 |
| NCE H 40F-80/220 | 40 | | | | | | | 220 | 8,5 |
| NCE H 50F-80/240 | 50 | | | | | | | 240 | 9,8 |
| NCE H 32F-100/220 | 32 | 10 | 11 | 0,1 | 1,5 | 10 | 180 | 220 | 7,4 |
| NCE H 40F-100/220 | 40 | | | | | | | 220 | 8,5 |
| NCE H 50F-100/240 | 50 | | | | | | | 240 | 9,8 |
| NCE H 32F-120/220 | 32 | 12 | 15 | 0,1 | 1,5 | 10 | 180 | 220 | 7,9 |
| NCE H 40F-120/220 | 40 | | | | | | | 220 | 8,7 |
| NCE H 50F-120/240 | 50 | | | | | | | 240 | 10 |

| DN | DE | DK | DG | holes | |
|----|-----|---------|----|-------|-------|
| | | | | N. | Ø |
| 32 | 140 | 90/100 | 74 | 4 | 14/19 |
| 40 | 150 | 100/110 | 80 | 4 | 14/19 |
| 50 | 165 | 110/125 | 90 | 4 | 14/19 |




NCE(D) H.F Energy saving circulating pumps with flanges



Examples of installations

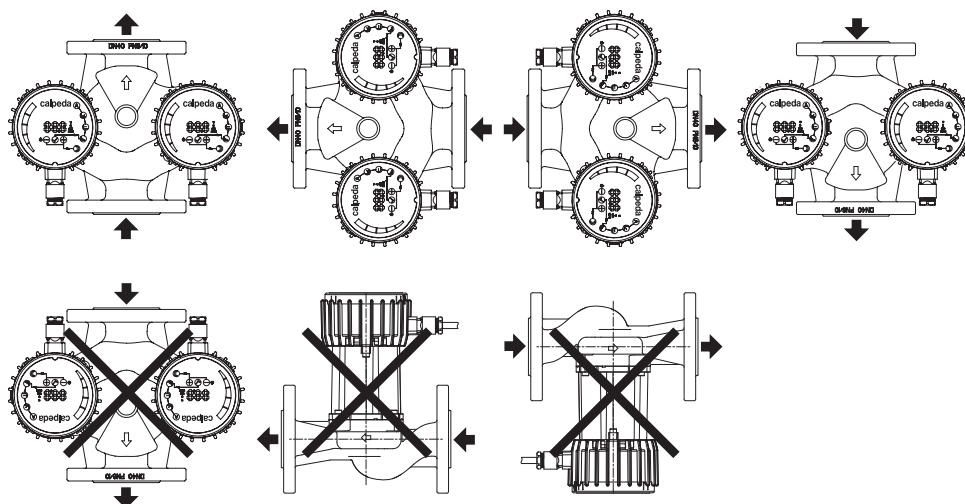

Dimensions and weights

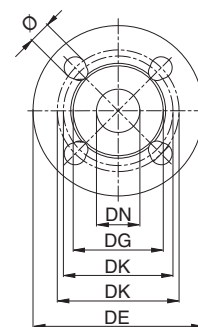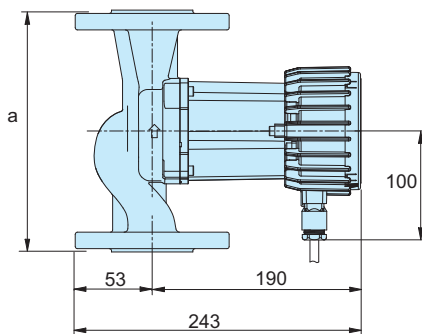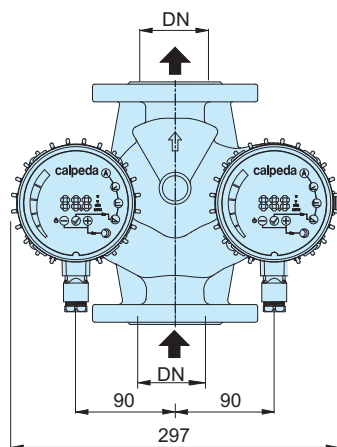

| TYPE | DN | H m | Q m ³ /h | 1~ 230 V | | P ₁ | | a mm | kg |
|---------------------------|----|--------|------------------------|----------|-------|----------------|-------|---------|------|
| | | | | A min | A max | W min | W max | | |
| NCED H 40F-40/220 | 40 | 4 | 5 | 0,1 | 0,5 | 10 | 60 | 220 | 11,3 |
| NCED H 40F-60/220 | 40 | 5 | 7,5 | 0,1 | 0,75 | 10 | 90 | 220 | 11,3 |
| NCED H 40F-80/220 | 40 | 8 | 9 | 0,1 | 1,15 | 10 | 140 | 220 | 11,3 |
| NCED H 40F-100/220 | 40 | 10 | 11 | 0,1 | 1,5 | 10 | 180 | 220 | 11,3 |
| NCED H 40F-120/220 | 40 | 12 | 15 | 0,1 | 1,5 | 10 | 180 | 220 | 11,3 |

| DN | DE | DK | DG | holes | |
|----|-----|---------|----|-------|-------|
| | | | | N. | Ø |
| 32 | 140 | 90/100 | 74 | 4 | 14/19 |
| 40 | 150 | 100/110 | 80 | 4 | 14/19 |
| 50 | 165 | 110/125 | 90 | 4 | 14/19 |